


KVM-108I / 116I 8/ 16 Port IP KVM Module

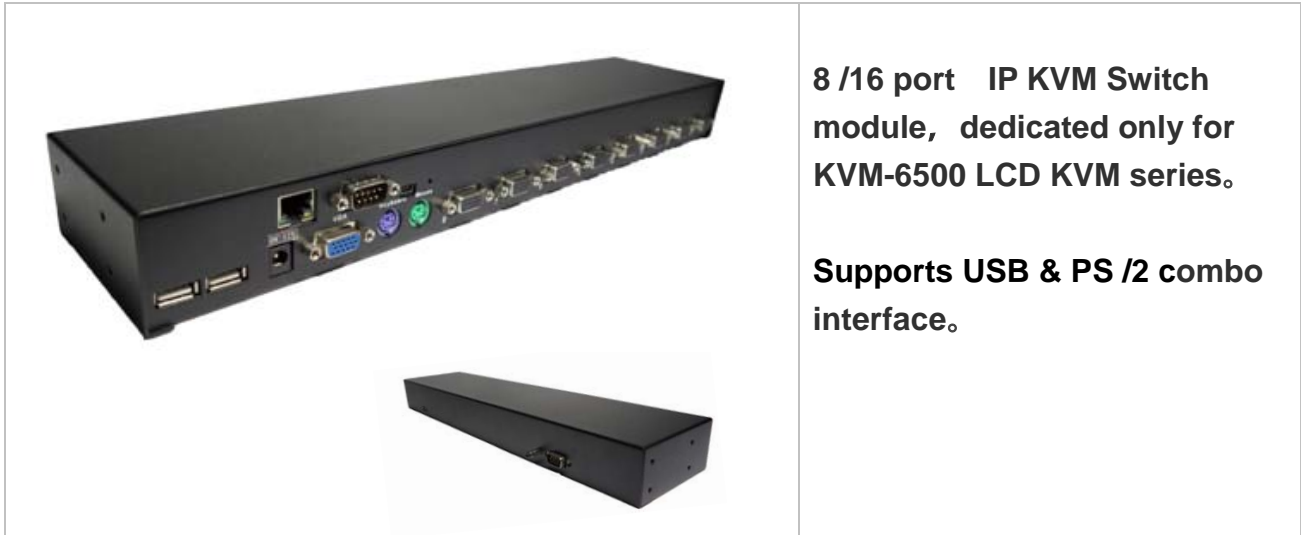

FEATURES

- Assembly of KVM-6500 LCD KVM series , enable one KVM console controls 8 or 16 computers ◦
- Remote KVM access and control via LAN or INTERNET ◦
- Both Computer and KVM console support USB and PS/2 interface ◦
- Full control under any OS, in BIOS mode, during boot, at Blue Screens ◦
- Supports TCP/IP, HTTP, HTTPS, UDP, RADIUS, DHCP, SSL, ARP, DNS protocol ◦
- Advance security protection — 256 bit SSL encryption of all transmitted data ◦
- Supports Cascading function , can expand up to 8 levels KVM Switch , connects up to 128/ 256 computers (by 8/ 16 port KVM Switch module) ◦
- VGA resolution up to 2048 x 1536 , supports DDC2B ◦
- IP access mode resolution up to 1600x1200@60Hz ◦
- Supports Windows , Linux and Mac OS8.5.. etc. with USB interface port ◦

APPLICATION



SPECIFICATIONS

Models	KVM-108I / 116I
Computers	8 / 16
Console Interface	1*USB+PS/2 Keyboard · 1*USB+PS/2 Mouse · 1*VGA
IP Browser Supported	IE6.0, Netscape7.0, Mozilla.1.6 (or above)
IP Setting	DHCP, Bootp, FixIP (DDNS supported)
IP Network Connecting Protocols	10/100 Ethernet, Telephone Line (External Modem) TCP IP ARP ICMP
PC Interface	HDB-15F * 8 / 16
Power Source	DC 7~12V / 1.0A
Size	410*110*44mm

CABLING

PC PS/2 cable (KA 520xP-65):



PC USB cable (KA 520xU-65):



Note: " x " can be 2, 3, 5, (2/3/5 meters)