

SK -1901C One Port IP KVM Console




The SK-1901C is an one port control unit that features remote BIOS-level access to servers. In addition, it can work with a KVM switch that does not have "over-IP" capability built in over-IP functionality.

Features:

- Accessible either from KVM Console or remote IP login in to a computer
- Support both TCP/IP & SNMP topology
- Built-in Web-based interface Windows and Java application, operate a computer by any Internet browser
- Operation through Windows GUI interface and Java Client
- Safety data encryption — supports 256 bit SSL and RADIUS spec.
- Up to 149 user accounts- supports max. 32 users to login through a single path
- Computer interface supports USB or PS/2 interface (change connection cable)
- KVM Console supports both USB and PS/2 combo interface
- KVM USB console equipped with USB2.0 interface, able to work with USB devices
- Built-in Virtual Media function
- Built-in Reset function key
- Serial connector to link with modem or Remote Power Control devices
- Offer two RJ45 port (1-In & 1-Out) as an alternative port
- VGA resolution up to 1600 x 1200 (remote), supports DDC2B
- LEDs indicate Power, LAN, Ready status
- Supports O/S includes Windows, Linux, Mac OS8.5 (with USB interface)
- On-line firmware upgradeable
- On 19" desktop and rack mount type

Applications:

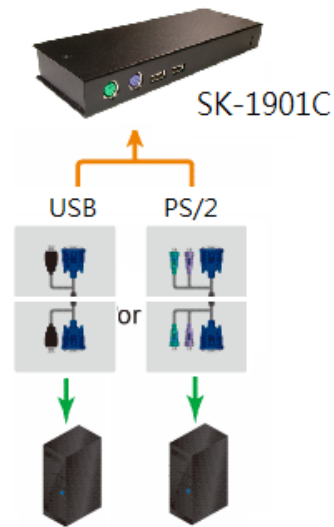

Specifications

Model no.	SK-1901C
PC Connection	1
PC Interface	HDB-15F *1 (USB or PS/2)
Console Interface	1* USB、 PS/2 Keyboard , 1* USB、 PS/2 Mouse, 1* VGA HDB-15
Function Connectors	LAN RJ-45 *2、 DB-9 *1、 Mini-USB *1
	TCP/IP, HTTP, HTTPS, UDP, RADIUS, DHCP, SSL, ARP, DNS, 10Base-T 及 100Base-T
Video Resolutions	1600x1200/Max. , DDC2B
Power Source	DC12V/ 2A
Size	200*72*25 /mm
Accessories	DC12 Power Adapter *1 , 1.8m PS/2 or USB Cable * 1
Optional	1U Rack Panel , 1.8、 3、 5m PS/2 or USB cable , Serial cable

*Specifications are subject to change without notice.