

## 8/16/32-port Cat5 KVM Switch




SK-1508/ SK-1516 /SK-1532 The 8/16/32 ports CAT5 KVM console switch that allows both local and extend operators to monitor and access multiple servers from a single console (Keyboard, Mouse and Monitor). Designed with the intelligent video Gain/EQ (equalizer) adjustments to tweak the video image individually for each server so that each server can be 130 feet away from the unit.

### FEATURES

- ◆ 1-Console 8/16/32-port CAT5 KVM switch
- ◆ Support USB or PS/2 combo interface for connecting to PC ports conveniently
- ◆ Support full CAT5 interface on all PC ports for reducing KVM cable bulk
- ◆ Support the connections include one local console(mouse, keyboard and VGA), one built-in CAT5 extender and one slot for optional plug-in IP remote console module
- ◆ Support Microsoft Windows, Netware, Unix, Linux
- ◆ Support iMac, Power MAC and Sun Micro Systems (SUN Micro system to PS2 Keyboard mapping table) with USB port
- ◆ Hot Plug – add or remove connected PCs without powering off the KVM switch or PCs
- ◆ Support up to 1600 x 1200 video resolution for 130 feet in Local console,  
1024 x 768 video resolution for 1000 feet CAT5-Based remote console  
1600 x 1200 video resolution for IP-Based remote console
- ◆ Keyboard status restored when switching PCs
- ◆ Each server can be 40 meters away from this KVM Switch by CAT5 UTP cable.
- ◆ Supports DDC-2 protocol and DDC/CI auto screen adjustment
- ◆ Supports both USB and PS/2 Cat5 dongle connected to PC or Server
- ◆ Supports both USB and PS/2 local keyboard/mouse
- ◆ Supports local console, CAT5 extension console (Optional) and IP Remote console (Optional) access ( SK-100I IP card )
- ◆ An optional CAT5 extension Console unit can be linked for an extension operator (up to 1000 feet away from the Cat5 KVM)
- ◆ firmware upgradeable

- ◆ Rack mount kit for 19" RACK

## APPLICATION

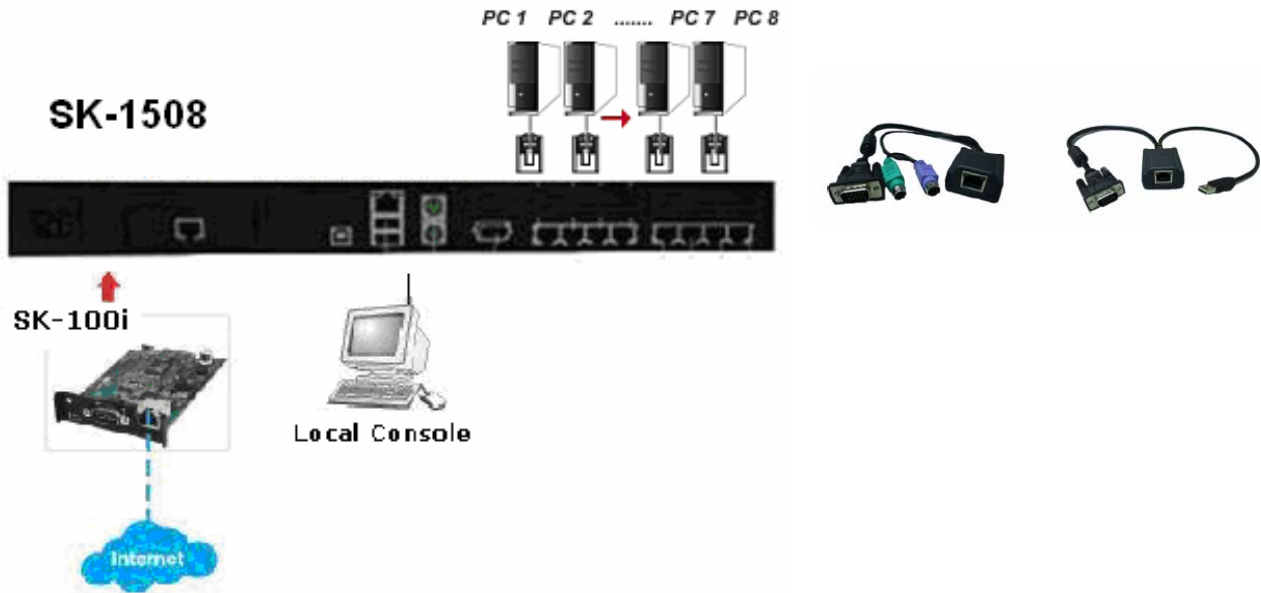

## SPECIFICATION

MODEL NO.		SK-1508/ SK-1516/ SK-1532
KVM PORT		8 / 16 / 32
CONSOLE PORT		1
KVM INTERFACE	PC	RJ-45
CONSOLE INTERFACE	MONITOR	HDB-15 ( Female )
	KEYBOARD	6 pin mini-DIN ( Female ) or USB Type A ( Female )
	MOUSE	6 pin mini-DIN ( Female ) or USB Type A ( Female )
OS SUPPORT		DOS 、 Windows 、 Linux 、 FreeBSD 、 Mac 、 Sun Micro
PC SELECT		HOT-KEYs 、 OSD 、 Button Switch
AUTO-SCAN		3 / 8/ 15/ 30 SEC.
RESOLUTION ( Max. )		1600 x1200
POWER INPUT		AC 100~240V
DIMENSION ( LxWxH )		440x185x42 mm ( 19" 1U)