


# VIDEO BNC TO VGA CONVERTER

ITEM NO.: VC-100BV

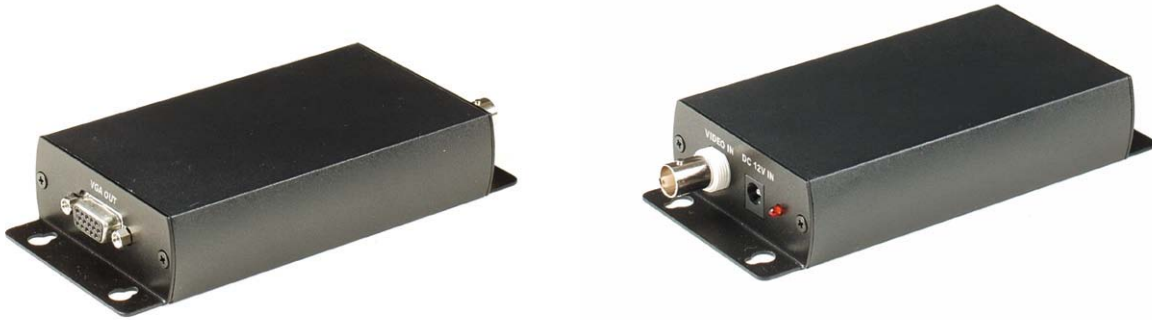

## Features:


- Special designed for CCTV color monitor,.
- Support NTSC M/N, PAL M/N, PAL, NTSC 4.43 and SECAM video system.
- Compact size, plug and play installation.
- On screen display function.
- Brightness, Contrast, Color, NTSC Tint Control.
- Resolution: NTSC: 640 x 480, PAL: 768 x 576.
- PAL, NTSC auto configure. (NTSC system for CRT/LCD monitor, PAL system for CRT monitor only).
- Power Supply Included.

## Operation Controls and Function:

1. Menu Button: Push the button to choose which function to be adjusted, from Tint, Color, Bright, Contract.  
Tint Indicator: Light when Tint is adjusted  
Color Indicator: Light when Color is adjusted.  
Bright Indicator: Light when Brightness is adjusted.  
Contrast Indicator: Light when Contract is adjusted.
2. Down Button: Press this button for reducing picture effects value.
3. Up Button: Press this button for adding picture effects value.

NOTE: If the picture abnormal at the first setting on LCD monitor, please adjust your LCD for normal picture.

## View of Connection and Installation:

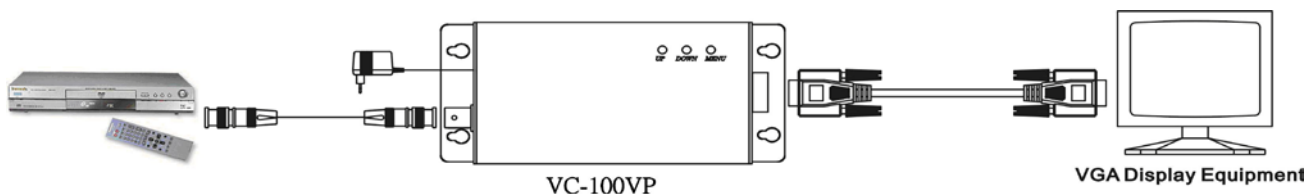

## Specification:

| ITEM NO.                | VC-100BV                                     |
|-------------------------|--|
| INPUT SIGNAL            | Composite Video, 1 Vp-p 75 ohm BNC Jack      |
| OUTPUT SIGNAL           | VGA: 0.7 Vp-p RGB, 15 pin D female connector |
| POWER CONSUMPTION       | 200mA  |
| POWER SUPPLY            | DC12V 500mA Regulated Power Supply           |
| DIMENSIONS W x H x D mm | 145x67x27                                    |
| WEIGHT g                | 220  |